


SHARPY WASH 330 PC

- I DIAGRAMMI FOTOMETRICI
- D FOTOMETRICHE DIAGRAMME
- GB PHOTOMETRIC DIAGRAMS
- E DIAGRAMOS FOTOMÉTRICOS
- F DIAGRAMMES PHOTOMETRIQUES

Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.
Key Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.
Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.
Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausleuchtung.
Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.

Minimum Zoom (7.2° 10% - 3.9° 50%)


Total Output: 18200 lumens

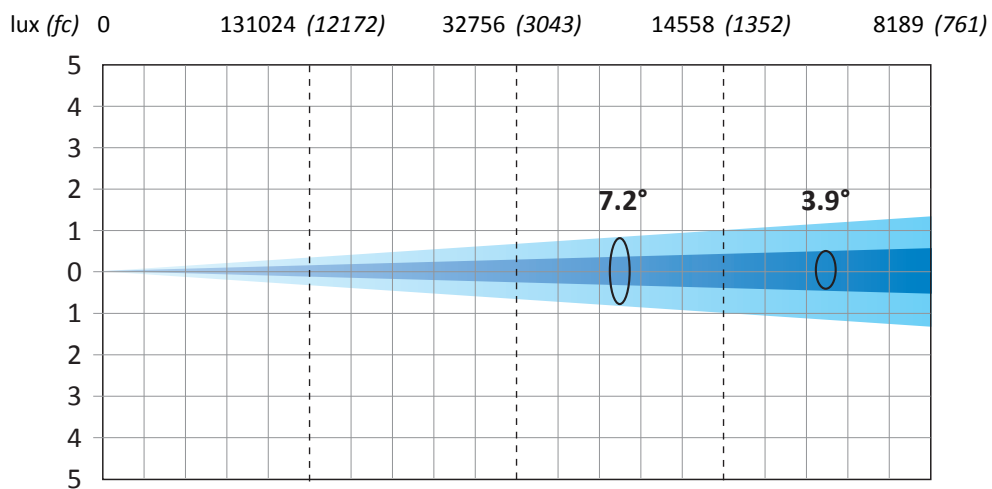

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	0.63 (2' 1")	1.26 (4' 2")	1.89 (6' 2")	2.52 (8' 3")
Diameter 50%	m (ft in)	0	0.34 (1' 1")	0.68 (2' 3")	1.02 (3' 4")	1.36 (4' 6")

Minimum Zoom with Light Frost (8.9° 10% - 4.6° 50%)

Total Output: 16300 lumens

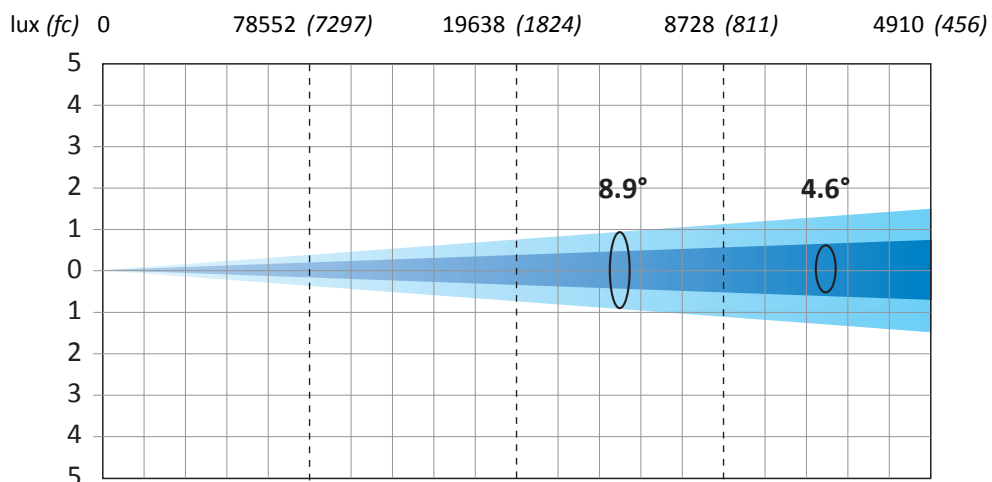

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	0.78 (2' 7")	1.55 (5' 1")	2.33 (7' 8")	3.10 (10' 2")
Diameter 50%	m (ft in)	0	0.41 (1' 4")	0.81 (2' 8")	1.22 (4' 0")	1.62 (5' 4")


SHARPY WASH 330 PC

- I** DIAGRAMMI FOTOMETRICI
- GB** PHOTOMETRIC DIAGRAMMS
- F** DIAGRAMMES PHOTOMETRIQUES

- D** FOTOMETRICHE DIAGRAMME
- E** DIAGRAMOS FOTOMÉTRICOS

Minimum Zoom with Heavy Frost (19.6° 10% - 11° 50%)


Total Output: 13200 lumens

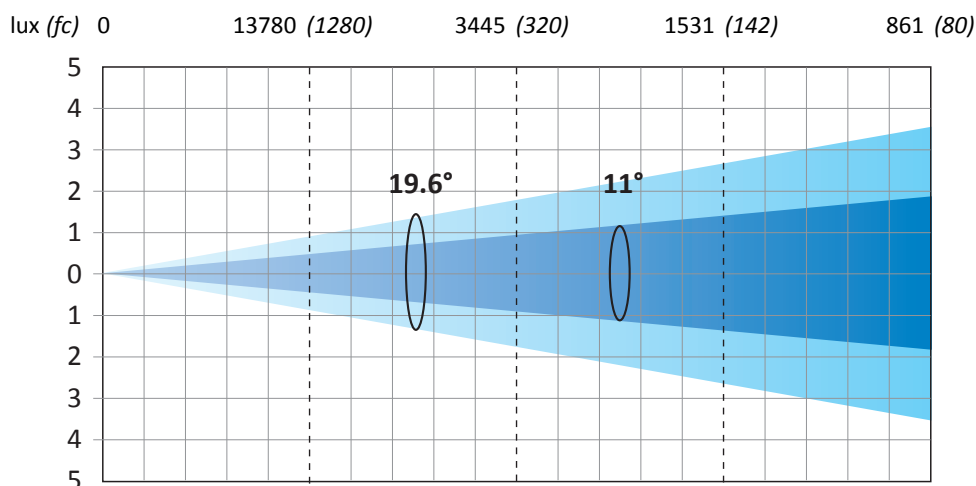

Distance	m (ft in)	0	5 (16' 5'')	10 (32' 10'')	15 (49' 3'')	20 (65' 7'')
Diameter 10%	m (ft in)	0	1.73 (5' 8'')	3.46 (11' 4'')	5.19 (17' 0'')	6.92 (22' 8'')
Diameter 50%	m (ft in)	0	0.97 (3' 2'')	1.93 (6' 4'')	2.90 (9' 6'')	3.86 (12' 8'')

Maximum Zoom with Light Frost (24.3° 10% - 15.9° 50%)

Total Output: 16600 lumens

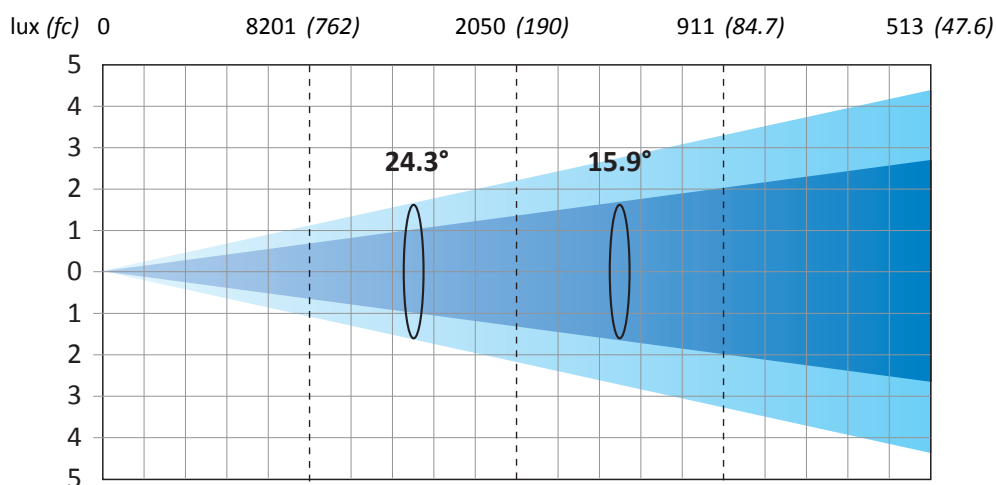


Distance	m (ft in)	0	5 (16' 5'')	10 (32' 10'')	15 (49' 3'')	20 (65' 7'')
Diameter 10%	m (ft in)	0	2.15 (7' 1'')	4.30 (14' 1'')	6.45 (21' 2'')	8.60 (28' 3'')
Diameter 50%	m (ft in)	0	1.40 (4' 7'')	2.80 (9' 2'')	4.20 (13' 9'')	5.60 (18' 4'')

SHARPY WASH 330 PC

- I DIAGRAMMI FOTOMETRICI
- GB PHOTOMETRIC DIAGRAMS
- F DIAGRAMMES PHOTOMETRIQUES

- D FOTOMETRICHE DIAGRAMME
- E DIAGRAMOS FOTOMÉTRICOS

Maximum Zoom with Heavy Frost (42.9° 10% - 25.2° 50%)
Total Output: 15700 lumens

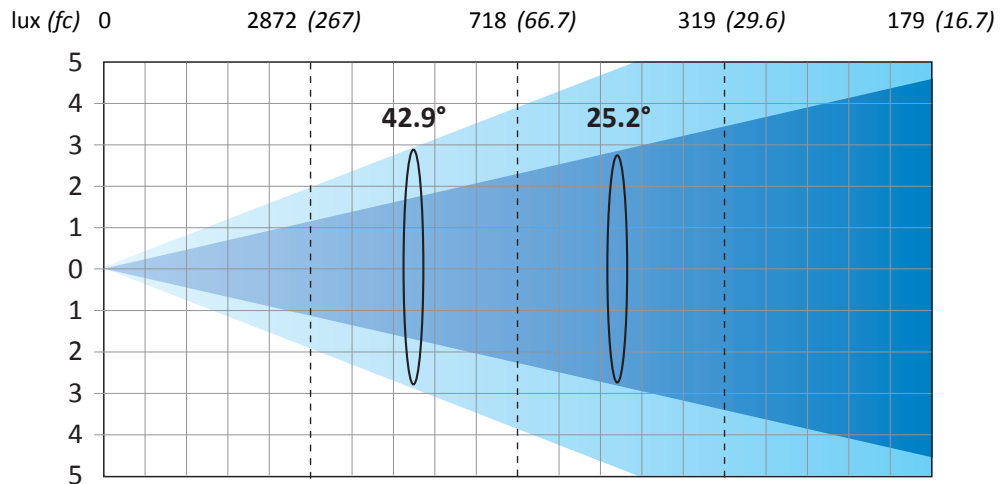

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	3.93 (12' 11")	7.87 (25' 10")	11.80 (38' 9")	15.73 (51' 7")
Diameter 50%	m (ft in)	0	2.23 (7' 4")	4.47 (14' 8")	6.70 (22' 0")	8.93 (29' 4")

