


MIN ZOOM

Beam opening

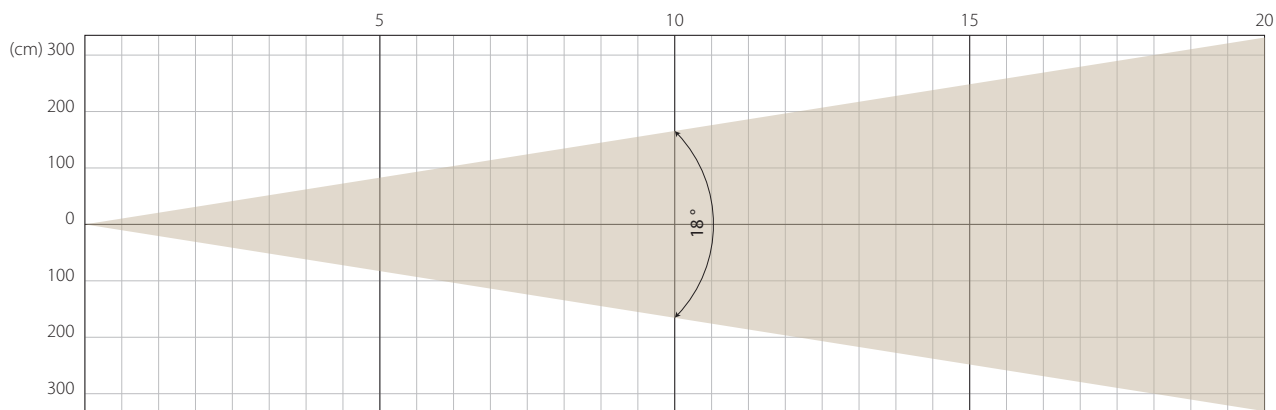


Intensity

| Distance (m) | 5 | | 10 | | 15 | | 20 | |
|--------------|-------|----------|-------|----------|------|----------|------|----------|
| unit | lux | diameter | lux | diameter | lux | diameter | lux | diameter |
| White | 66872 | 1.6 | 16718 | 3.26 | 7430 | 4.89 | 4179 | 6.52 |

MIDDLE ZOOM

Beam opening

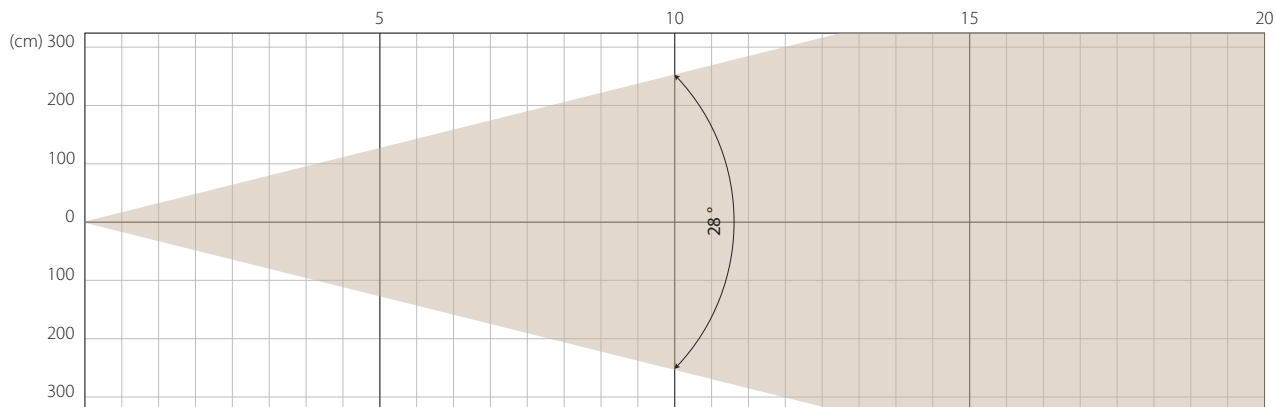


Intensity

| Distance (m) | 5 | | 10 | | 15 | | 20 | |
|--------------|-------|----------|------|----------|------|----------|------|----------|
| unit | lux | diameter | lux | diameter | lux | diameter | lux | diameter |
| White | 22759 | 2.54 | 5690 | 5.08 | 2529 | 7.62 | 1422 | 10.16 |

MAX ZOOM

Beam opening

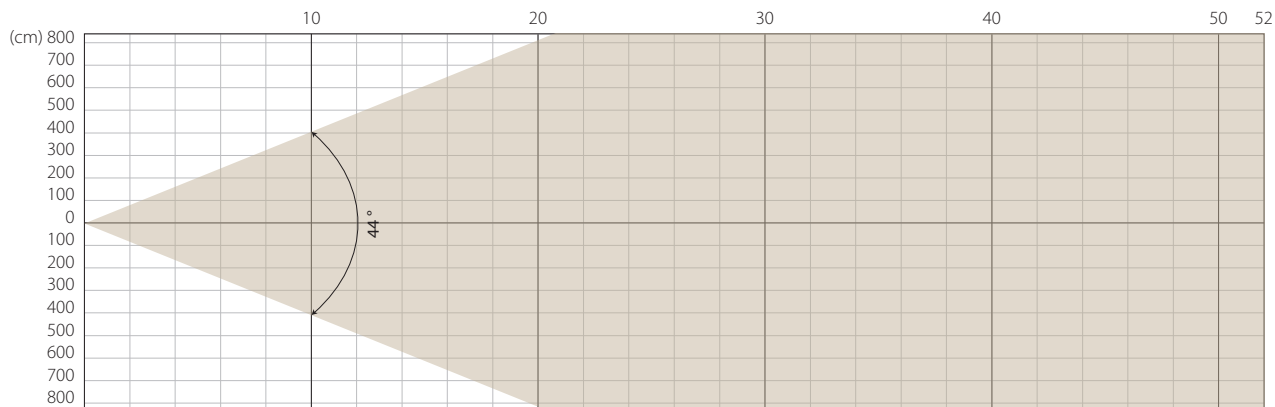

Intensity

| Distance (m) | 5 | | 10 | | 15 | | 20 | |
|--------------|-------|----------|------|----------|------|----------|-----|----------|
| unit | lux | diameter | lux | diameter | lux | diameter | lux | diameter |
| White | 10361 | 4 | 2590 | 7.98 | 1151 | 11.97 | 648 | 15.96 |



| | |
|-------------------|----------------------|
| Total Flux | 60876 lm (@zoom 128) |
|-------------------|----------------------|

| | |
|----------------|---------------|
| CCT | 6000 (±400K) |
| Ra / R9 | Ra=92 / R9=75 |
| TLCI | 95 |
| TM-30 | Attached |

| Fan Mode | Noise Level (dBA) | Flux (lm by Sphere) |
|----------------------|--------------------------|----------------------------|
| Auto | 54 | 58064 |
| Stage | 45 | 45916 |
| Silence | 56 | 60876 |
| Super Silence | 51 | 56718 |

Note: noise measured @1m distance, static status, ambient 31 dBA.

| | | |
|-----------------------------------|-------------------|--------|
| Voltage / Power | 100-240V, 50-60HZ | 1600W |
| Fixture Dimension / Weight | 547x348.2x701.5mm | 36.5Kg |
| Packing Dimension / Weight | 70x43x82cm | 55Kg |